



PS Range

(5yr Design Life in Float Service at 20°C)

Dimensions (mm)

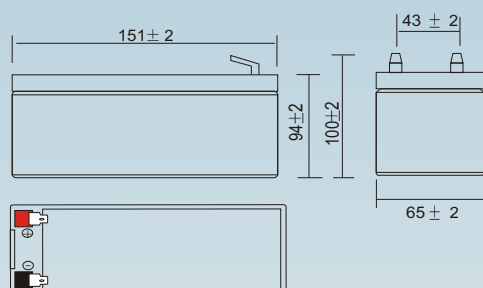

Standard terminal (mm)

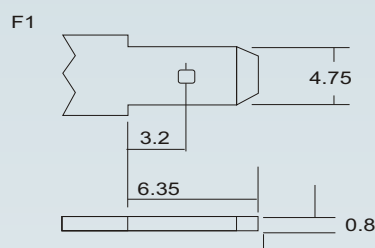

Physical Specification

Nominal Voltage		12V
Nominal Capacity		7.0AH
Dimension	Length	151 ± 2 mm
	Width	65 ± 2 mm
	Container Height	94 ± 2 mm
	Total Height (with terminal)	100 ± 2 mm
Weight		Approx 2.25kg
Standard Terminal		F1

PS-1270 12V 7.0AH



Container and Lid Material/Flammability Rating

ABS UL94 std or UL94 V0 Option.

Discharge Characteristics (25°C, 77°F)

Rated Capacity	20hr Rate(1.80V/cell) 10hr Rate(1.80V/cell) 5hr Rate(1.75V/cell) 3hr Rate(1.75V/cell) 1hr Rate(1.60V/cell)	7.00AH 6.53AH 5.80AH 5.13AH 4.26AH	Constant Voltage Charge	Cycle	Initial Charging Current Less than 1.75A Voltage 14.40V ~ 15.0V at 25°C (77°F)
Capacity Affected by Temperature	40°C (104°F) 25°C (77°F) 0°C (32°F)	103% 100% 86%		Standby	Recommended Charge Current less than 1.75A Voltage 13.5V ~ 13.8V at 25°C (77°F)

Internal Resistance mΩ


28.0 mΩ

Constant Current Discharge (Amperes) at 25°C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	16.0	11.7	9.97	8.46	6.17	4.52	3.60	2.14	1.60	1.30	1.10	0.95	0.756	0.626	0.343
1.80V/cell	19.2	13.7	11.3	9.20	6.65	4.80	3.83	2.24	1.66	1.35	1.14	0.99	0.783	0.653	0.350
1.75V/cell	21.5	14.9	12.0	9.70	6.92	4.99	3.98	2.31	1.71	1.38	1.16	1.01	0.795	0.663	0.357
1.70V/cell	23.4	15.9	12.8	10.2	7.18	5.12	4.05	2.36	1.75	1.41	1.19	1.03	0.812	0.672	0.361
1.65V/cell	25.5	16.8	13.4	10.6	7.43	5.28	4.17	2.40	1.77	1.43	1.21	1.04	0.823	0.680	0.365
1.60V/cell	26.8	17.6	13.8	10.9	7.64	5.42	4.26	2.46	1.81	1.46	1.23	1.06	0.837	0.690	0.371

Constant Power Discharge (Watts/cell) at 25 °C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	30.3	22.3	19.2	16.4	12.0	8.86	7.09	4.23	3.17	2.59	2.20	1.91	1.52	1.26	0.694
1.80V/cell	35.9	25.8	21.5	17.7	12.9	9.37	7.52	4.42	3.30	2.69	2.27	1.97	1.57	1.31	0.704
1.75V/cell	39.8	28.0	22.8	18.6	13.4	9.72	7.79	4.55	3.37	2.74	2.31	2.00	1.59	1.33	0.716
1.70V/cell	42.8	29.5	24.0	19.3	13.8	9.89	7.88	4.61	3.42	2.78	2.34	2.03	1.61	1.33	0.718
1.65V/cell	45.7	30.7	24.8	19.8	14.1	10.1	8.02	4.65	3.45	2.80	2.36	2.05	1.62	1.34	0.720
1.60V/cell	47.0	31.5	25.1	20.1	14.3	10.3	8.13	4.73	3.50	2.83	2.39	2.07	1.63	1.35	0.728



Power-Sonic Europe Limited
3 Buckingham Square, Wickford, Essex, SS1
Tel: +44 (0)1268 560686
sales@power-sonic.co.uk
www.power-sonic.co.uk